



Inter-Drain *Sales* bv.

the best in earth



Inter-Drain 2030 GP




Trenchers | Kettinggravers
Trancheuses | Grabenfräsen

[Http://www.inter-drain.com](http://www.inter-drain.com)



Inter-Drain Sales bv.

the best in earth

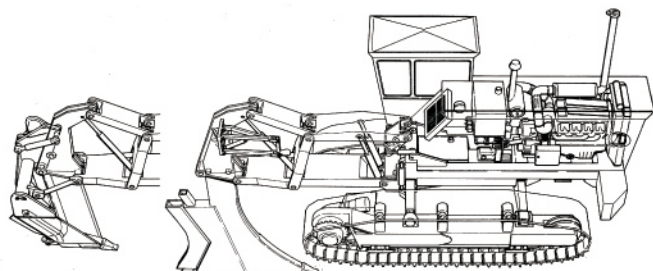

PLOUGH TYPE	2030 GP	2040GP	2050GP
ENGINE			
Make 1)	Volvo	Volvo	Volvo
Power Hp. (kw)	350 (257)	422 (311)	540 (397)
Fuel tank capacity	850 L.	920 L.	1050 L.
Electrical system	24 Volt	24 Volt	24 Volt
TRACKS			
Propulsion	Independent	Independent	Independent
Transmission	Hydrost.	Hydrost.	Hydrost.
Suspension	Oscill.	Oscill.	Oscill.
Type (equiv. Cater.)	D5B	D5B/D7	D7G
Length 2)	6 m.	6 m.	6 m.
Width 2)	0,76 m.	0,80 m.	0,80 m.
Ground pressure	0,33 kg/cm ²	0,37 kg/cm ²	0,40 kg/cm ²
PLOUGH			
Depth regulating system	Double parall.	Double parall.	Double parall.
Type	I-V	I-V	I-V
Swivel	6°	6°	6°
Tilt control	Automat.	Automat.	Automat.
Float control	Press. var.	Press. var.	Press. var.
PERFORMANCE			
Working speed	0-3 km/h	0-3,2 km/h	0-3,5 km/h
Travel speed	5 km/h	5,5 km/h	5,5 km/h
Depth (avarage)	1,00-1,50 m.	1,20-1,60 m.	1,20-1,80 m.
Depth (max.)*	1,80 m.	2,00 m.	2,00 m.
Pipe sizes up till*	0,20 m. (Vø 0,12 m.)	Ø 0,20 m.	Ø 0,20 m.
Theor. Drawbar pull (approx.)	30 t.	37 t.	55 t.
SIZES AND WEIGHT			
Length	9,5 m.	10 m.	10 m.
Width	2,95 m.	3,2 m.	3,2 m.
Height (transp. pos.)	3,1 m.	3,25 m.	3,25 m.
Weight (approx)	28 t.	32 t.	34 t.
OPTIONS			
1) Other engine make		1 m. = 3,28 feet	
2) Longer, wider tracks		1 ton = 2200 lbs	
Slope compensation			
Auto grade system			
Multi. Plough			
V-shape plough			